

NATURAL TILES

byCUPA

INDEX

1.	CHOCOLATE SANDSTONE	3
2.	TEKA SANDSTONE	5
3.	TERRA SANDSTONE	7
4.	WENGUÉ SANDSTONE	9
5.	BRUNO BASALT	11
6.	BRUNO BASALT flamed	13
7.	JET-BLACK LIMESTONE	15
8.	BONAR LIMESTONE	17
9.	BLAMUR LIMESTONE	19
10.	CUPA BLUE LIMESTONE honed	21
11.	CUPA BLUE LIMESTONE bush-hammered	23
12.	CARIOCA BRONZE QUARTZITE	25
13.	ORIENT LIGHT QUARTZITE	27
14.	ORIENT GREY QUARTZITE	29
15.	ORIENT GOLD QUARTZITE	31
16.	ORIENT GOLD QUARTZITE mushroom	33
17.	CUPA GREEN QUARTZITE	35
18.	ANTHRACITE GREY PHYLLITE	37
19.	CLASSIC BEIGE MARBLE	39
20.	YELLOW MARBLE	41
21.	CELESTE SLATE	43
22.	STORM SLATE	45
23.	MAKALI SLATE	47
24.	MULTICOLORED SLATE	49
25.	MULTICOLOURED RUSTIC SLATE	51
26.	MULTICOLOURED RUSTIC SLATE mushroom	53
27.	MULTICOLOURED ASIA SLATE	55
28.	NAVY SLATE	57
29.	GRAFFITI SLATE	59
30.	GUYANA GREEN SLATE	61
31.	RIOJA KENYA SLATE	63

CHOCOLATE SANDSTONE

ORIGIN: India

Reddish rock with distinctive striping, alternating between dark and red strips.



+

MEASURES Standard: 60x40cm. Thickness: 2cm.
Can be produced in any size up to 160x80cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish *
	BROWN	RED	COLOR	LOW	-

* Finish: Rectified.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	EXFOLIATED	AVERAGE	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	NO	NO	NO	YES	NO	NO

+


TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.390kg/m ³
	Water absorption (%)	2.67±0.31%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 10.02±1.60MPa Vie: 6.74MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 10.07±1.68MPa Vie: 6.78MPa
Abrasive resistance (mm)		23.1mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 93 / wet: 85

+

Test results and technical information available in: CUPA-STONE.COM

CHOCOLATE SANDSTONE

Actual size.

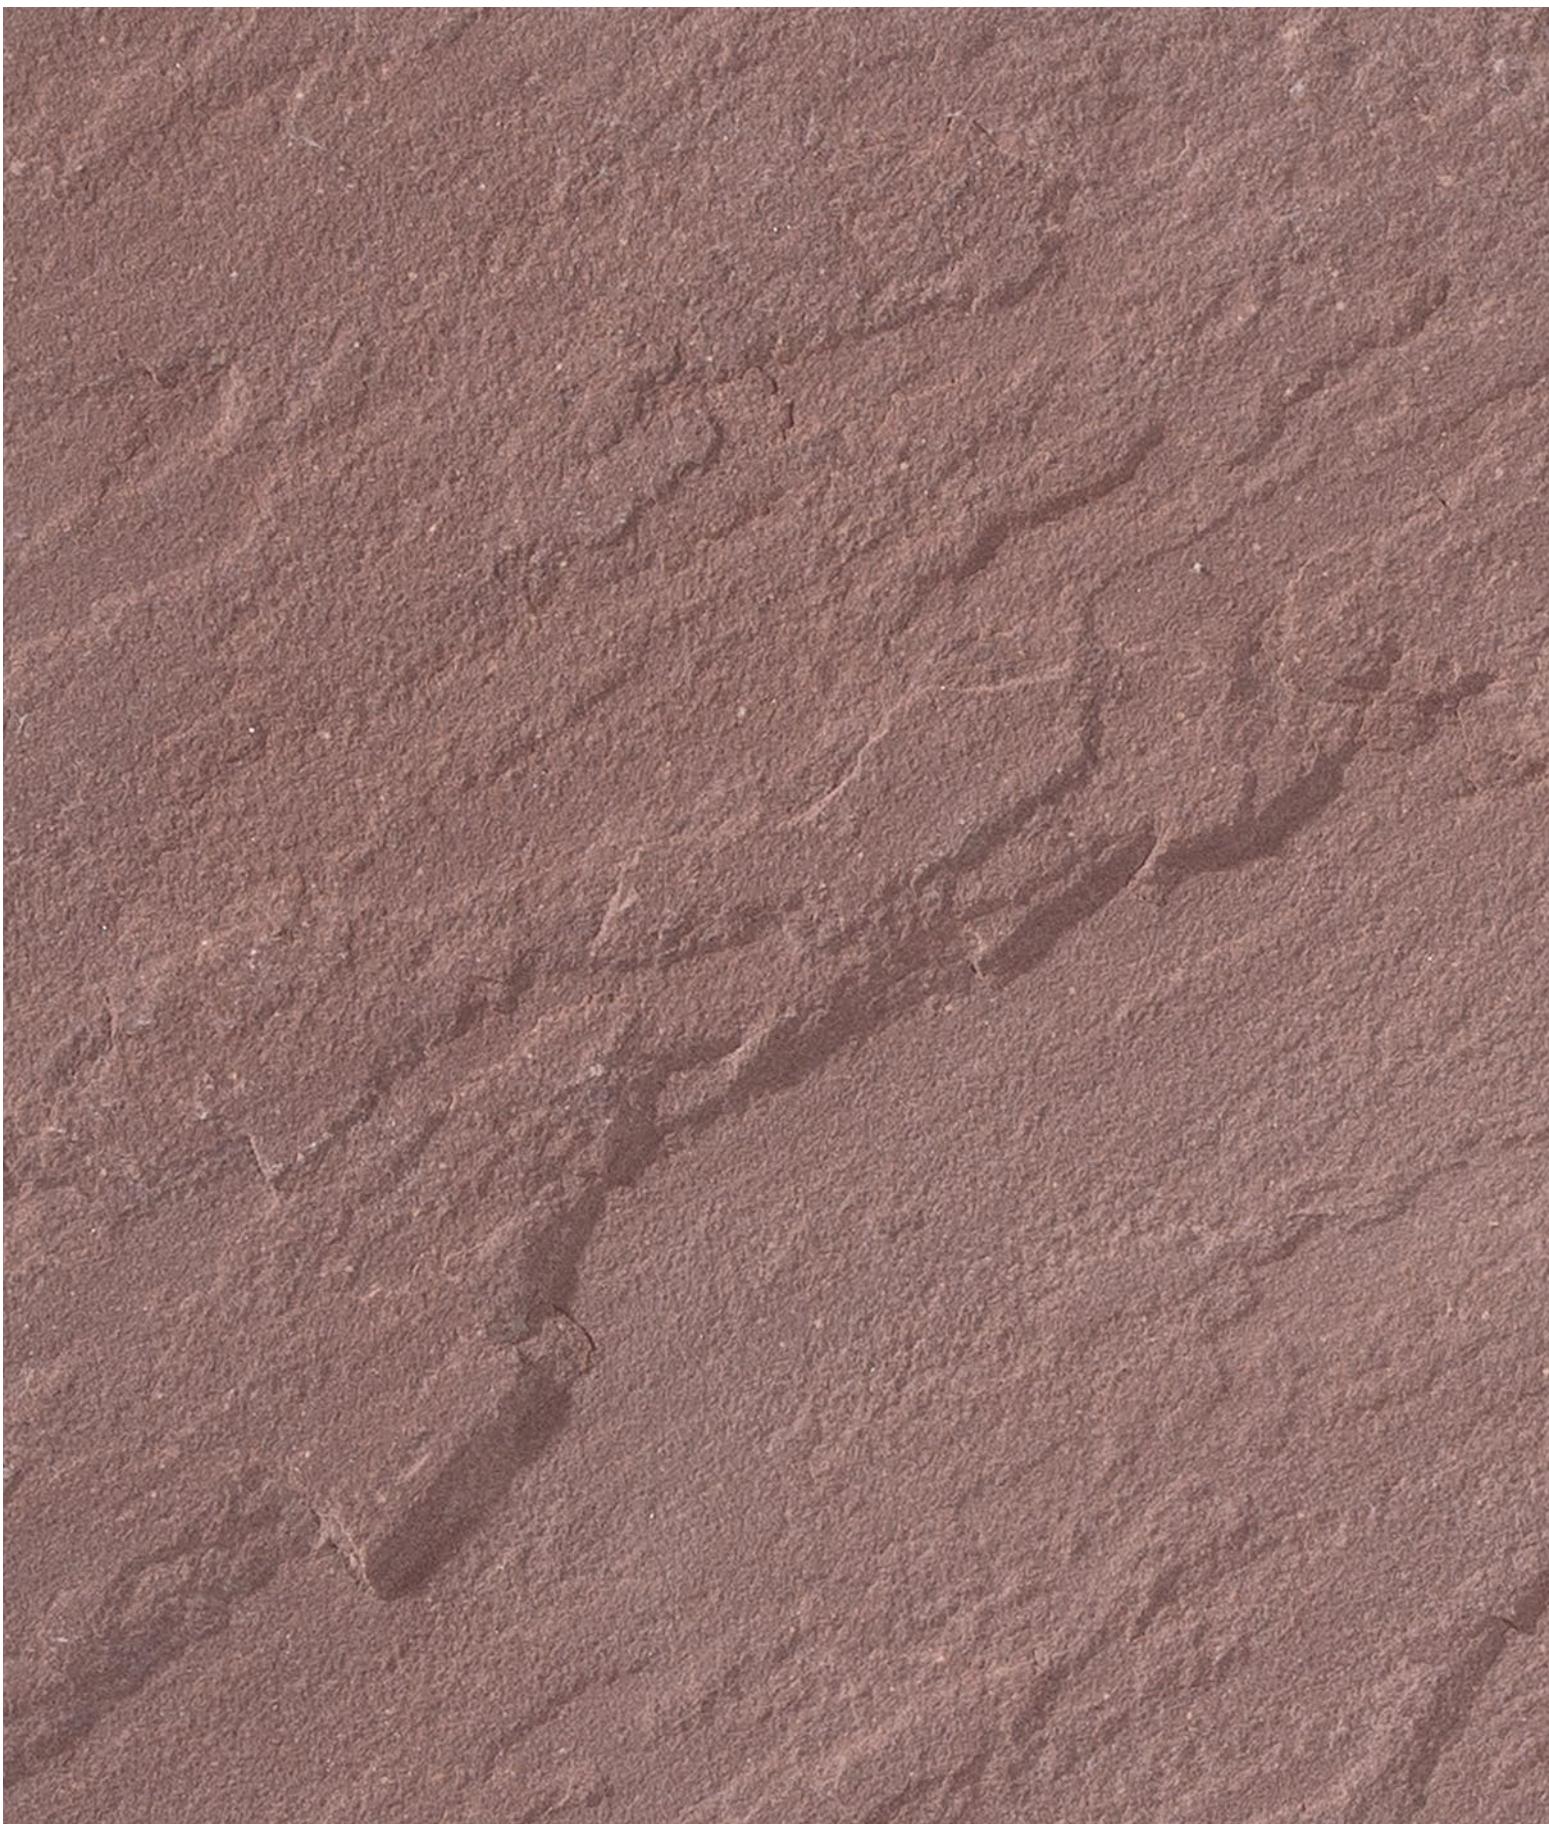

TEKA SANDSTONE

ORIGIN: India

Beige colored rock with a distinctive wooden look and brown grain.



Standard: 60x30cm, 60x40cm. Thickness: 1.5 to 3cm.

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.5 to 3cm.
Can be produced in any size up to 200x100cm.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	EARTH	VEINED	COLOR	NORMAL	-

* Finish: Sawn, honed, sandblast.

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	NO	NO	NO	YES	NO	NO

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.030kg/m ³
	Water absorption (%)	7.12±3 1.17 %
	Reaction to fire	A1
	Bending strenght (MPa)	Dry/Med.Value 8.61±1.44MPa Vie: 5.45MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 8.23±1.32MPa Vie: 5.50 MPa
	Abrasive resistance (mm)	24.3mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 95 / wet: 78

TEKA SANDSTONE


Actual size.



TERRA SANDSTONE

ORIGIN: India

Earth colored rock, homogeneous and light.

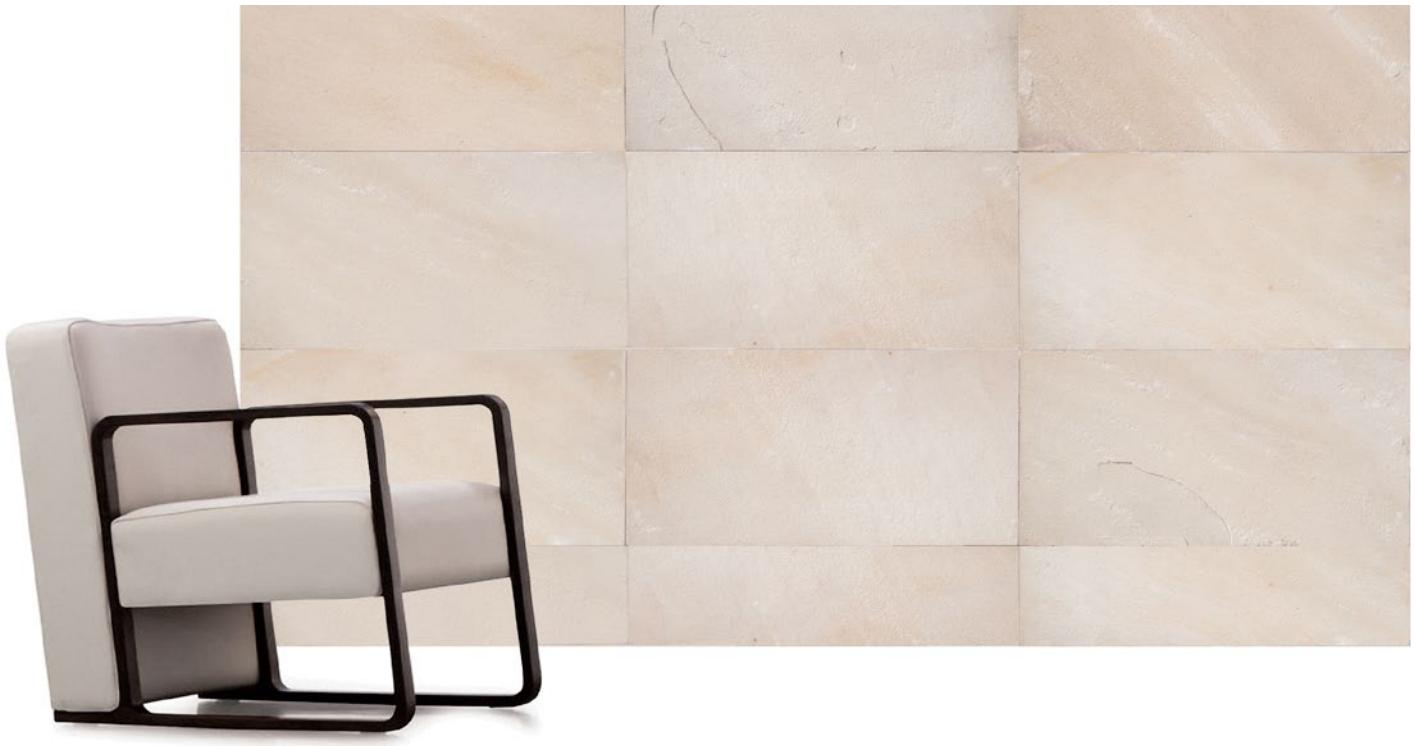

Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 160x80cm.

Main color	Secondary colour	Tone	Tone variation	Finish*
EARTH	BROWN	LIGHT	LOW	

* Finish: Natural aged sawn

Texture	Absorption	Oxidation	Strength	Cleaning
---------	------------	-----------	----------	----------

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	DEPENDING ON USE	YES	DEPENDING ON USE	NO	NO

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.390kg/m ³
	Water absorption (%)	2.98±0.29%
	Reaction to fire	A2
	Bending strenght (MPa)	Dry/Med.Value 15.73±3.34MPa Vie: 8.38MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 12.59±3.49MPa Vie: 5.30MPa
	Abrasive resistance (mm)	26.8mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 71 / wet: 54

TERRA SANDSTONE

Actual size.



WENGUÉ SANDSTONE

ORIGIN: China

Brown sedimentary rock with brown and reddish seams. Very original wooden look.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.5 to 3cm.
Can be produced in any size up to 200x70cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BROWN	RED	COLOR	LOW	-

* Finish: Apomazada, calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	SANDY	AVERAGE	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	NO	NO	NO	YES	NO	NO

+

TECHNICAL INFORMATION	Specific weight (kg/m³)	2.490kg/m³
	Water absorption (%)	2.15±0.07%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 14.58±1.11MPa Vie: 12.17MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.13±0.57MPa Vie: 12.89MPa
Abrasive resistance (mm)		18.8mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 103 / wet: 50

+

Test results and technical information available in: CUPA-STONE.COM

WENGUÉSANDSTONE

Actual size.



BRUNOBASALT

ORIGIN: China

Dark grey colored volcanic rock with visible iron crystals



Standard: 60x30cm, 60x40cm, Thickness: 1 to 3cm.

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 200X70cm.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BLACK	DARK GRAY	VERY DARK	VERY LOW	-

* Finish: Honed, calibrated, flameado, polished.

Texture	Absorption	Oxidation	Strength	Cleaning
POLISHED/RIDGED	LOW	NO	EXTRAORDINARY	VERY EASY/EASY

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	NO	YES	NO	YES	YES

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.990kg/m ³
	Water absorption (%)	2.15±0.07%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 14.58±1.11MPa Vie: 12.17MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.13±0.57MPa Vie: 12.89MPa
	Abrasive resistance (mm)	18.8mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 103 / wet: 50

BRUNOBASALT

Actual size.



BRUNOBASALT flamed

ORIGIN: China

Dark grey colored volcanic rock with visible iron crystals



MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 200X70cm.

Main color	Secondary colour	Tone	Tone variation	Finish*
BLACK	DARK GRAY	VERY DARK	VERY LIGHT	

* Finish: Honed calibrated flamed polished

Texture	Absorption	Oxidation	Strength	Cleaning
---------	------------	-----------	----------	----------

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	NO	YES	NO	YES	YES

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.990kg/m ³
	Water absorption (%)	2.15±0.07%
	Reaction to fire	A1
	Bending strenght (MPa)	Dry/Med.Value 14.58±1.11MPa Vie: 12.17MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.13±0.57MPa Vie: 12.89MPa
	Abrasive resistance (mm)	18.8mm.
	Slip resistance (mm)	SRV Values (natural finish):: dry: 103 / wet: 50

BRUNO BASALT flamed

Actual size.



JET-BLACK LIMESTONE

ORIGIN: India

Dark grey colored volcanic rock with visible iron crystals



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 150X60cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	DARK GRAY	BLACK	DARK	LOW	-

* Finish: Rectified, no calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	FINE GRAIN	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	0.18±0.03%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 30.64±4.71MPa Vie: 20.82MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 28.25±3.93MPa Vie: 13.91MPa
Abrasive resistance (mm)		
Slip resistance (mm)		
SRV Values (natural finish): dry: 75 / wet: 58		

+

Test results and technical information available in: CUPA-STONE.COM

JET-BLACK LIMESTONE

Actual size.



BONAR LIMESTONE

ORIGIN: Spain

Homogeneous limestone with fine grain and a distinctive beige colour.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 2 to 3cm.
Can be produced in any size up to 150X70cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GOLDEN	BROWN	LIGHT	LOW	-

* Finish: Natural, aged, honed, sawn and polished.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.430kg/m ³
	Water absorption (%)	-
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 10.7MPa
	Frost resistance (MPa)	-
	Abrasive resistance (mm)	3.42%mm.
	Slip resistance (mm)	-

+

BONARLIMESTONE

Actual size.



BLAMUR LIMESTONE

ORIGIN: Spain

White limestone with crystalline cement colored veins.



MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.5 to 3cm.
Can be produced in any size up to 150X70cm.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	WHITE	GRAY	LIGHT	UNIFORM	NATURAL

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT	LOW	NO	GOOD	EASY

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	NO

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.660kg/m ³
	Water absorption (%)	0.90%
	Reaction to fire	A1
	Bending strenght (MPa)	Dry/Med.Value 12.40MPa
	Frost resistance (MPa)	Resistant after 56 cycles: Med.Value 13.9MPa
	Abrasive resistance (mm)	18.5mm.
	Slip resistance (mm)	SRV Values (natural finish): honed: 13 / bush-hammered: 41

BLAMURLIMESTONE

Actual size.



CUPA BLUE LIMESTONE honed

ORIGIN: China

Dark toned carbonate rock, with very fine grain size and dolomite formations.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.5 to 3cm.
Can be produced in any size up to 240x120cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	BLACK	GRAY	DARK	LOW	ALL

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	VERY FINE GRAIN	LOW	NO	GOOD	VERY EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.720kg/m ³
	Water absorption (%)	0.13±0.01%
	Reaction to fire	-
	Bending strength (MPa)	Dry/Med.Value 22.8±4.0MPa Vie: 14.4MPa
Frost resistance (MPa)		Resistant after 56 cycles: Med.Value 15.1±3.12MPa Vie: 9.4MPa
Abrasive resistance (mm)		21.9±0.66mm.
Slip resistance (mm)		SRV Values (honed finish): dry: 47 / wet: 9.3 SRV Values (bush-hammered finish): dry: 85 / wet: 69

+

Test results and technical information available in: CUPA-STONE.COM

CUPA BLUE LIMESTONE honed

Actual size.



CUPA BLUELIMESTONE bush-hammered

ORIGIN: China

Dark-toned carbonate rock, with very fine grain size and dolomite formations.



Standard: 60x30cm, 60x40cm, Thickness: 1.5 to 3cm.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	BLACK	GRAY	DARK	LOW	ALL

Texture	Absorption	Oxidation	Strength	Cleaning
VERY FINE GRAIN	LOW	NO	GOOD	VERY EASY

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.720kg/m ³
	Water absorption (%)	0.13±0.01%
	Reaction to fire	-
	Bending strength (MPa)	Dry/Med.Value 22.8±4.0MPa Vie: 14.4MPa
	Frost resistance (MPa)	Resistant after 56 cycles: Med.Value 15.1±3.12MPa Vie: 9.4MPa
	Abrasive resistance (mm)	21.9±0.66mm.
	Slip resistance (mm)	SRV Values (honed finish): dry: 47 / wet: 9.3 SRV Values (bush-hammered finish): dry: 85 / wet: 69

CUPA BLUELIMESTONE bush-hammered

Actual size.



CARIOCA BRONZE QUARTZITE

ORIGIN: Brasil

Bronze stone with ochre shades and a very rough natural texture.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1.5cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GOLDEN	RED	COLOR	HIGH	-

* Finish: Natural/natural, serrada, corte Manual.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	VERY RIDGED	AVERAGE	YES	MODERATE	COMPLEX

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	NO	NO	YES	YES	NO	NO

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.380kg/m ³
	Water absorption (%)	3.80±0.45%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 13.67±4.14MPa Vme: 5.72MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 10.58±3.36MPa Vme: 4.85MPa
Abrasive resistance (mm)		23mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 74 / wet: 69

+

Test results and technical information available in: CUPA-STONE.COM

CARIOCA BRONZE QUARTZITE

Actual size.



ORIENT LIGHT QUARTZITE

ORIGIN: China

Cream and light colored marble-type stone with possibility of grey streaks.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1.5cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	WHITE	GOLDEN	LIGHT	NORMAL	NATURAL

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	RIDGED	LOW	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	0.27±0.04%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 10.34±3.96MPa Vme: 3.87MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 7.72±4.99MPa Vme: 1.06MPa
	Abrasive resistance (mm)	27.5mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 75 / wet: 55

+

Test results and technical information available in: CUP4STONE.COM

ORIENT LIGHT QUARTZITE

Actual size.



ORIENT GREY QUARTZITE

ORIGIN: China

Marble-type stone with grey tones, possibility of yellow streaks and a shiny appearance.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1cm.
Can be produced in any size up to 100X50cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	DARK GRAY	GRAY	LIGHT	LOW	-

* Finish: Natural, sawn. No calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	RIDGED	LOW	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+


TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.710kg/m ³
	Water absorption (%)	0.28±0.02%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 20.32±3.74MPa Vie: 13.15MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 16.87±5.12MPa Vie: 5.26MPa
Abrasive resistance (mm)		27.5mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 75 / wet: 55

+

Test results and technical information available in: CUP4STONE.COM

ORIENT GREY QUARTZITE

Actual size.

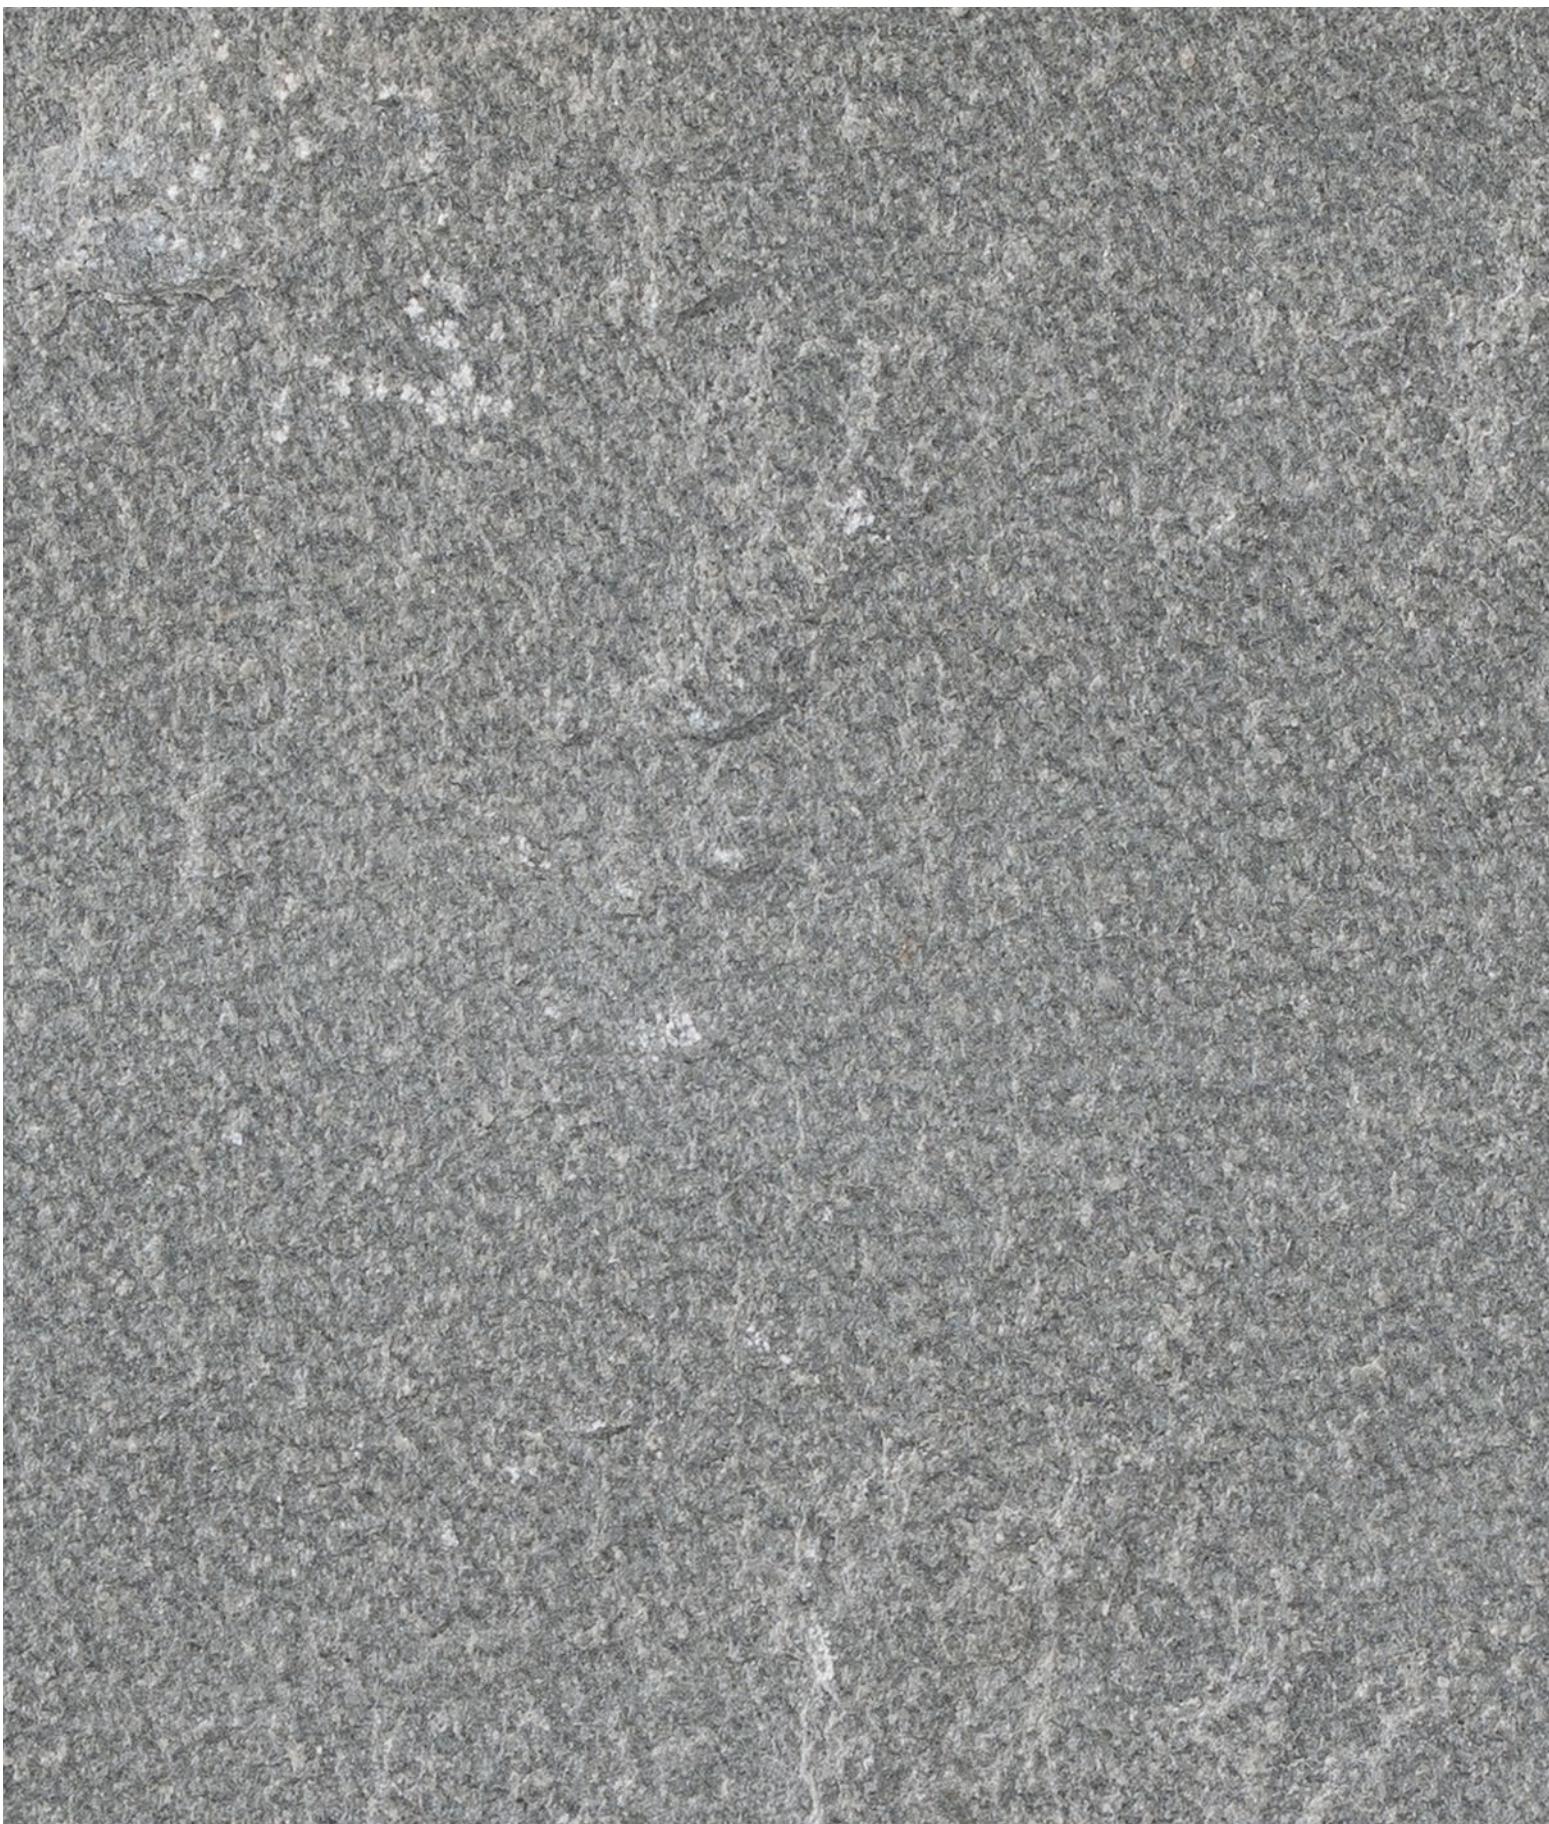

ORIENT GOLD QUARTZITE

ORIGIN: China

Ochre and gold colored marble-type stone with possibility of grey streaks.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1cm.
Can be produced in any size up to 100X50cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GOLDEN	GRAY	LIGHT	HIGH	-

* Finish: Sawn, no calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	RIDGED	LOW	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	0.27±0.04%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 18.02±2.93MPa Vie: 13.15MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.60±5.94MPa Vie: 10.65MPa
Abrasive resistance (mm)		27.5mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 75 / wet: 55

+

Test results and technical information available in: CUPA-STONE.COM

ORIENT GOLD QUARTZITE


Actual size.



ORIENT GOLD QUARTZITE mushroom

ORIGIN: China

Ochre and gold colored marble-type stone with possibility of grey streaks. Rough sawn.

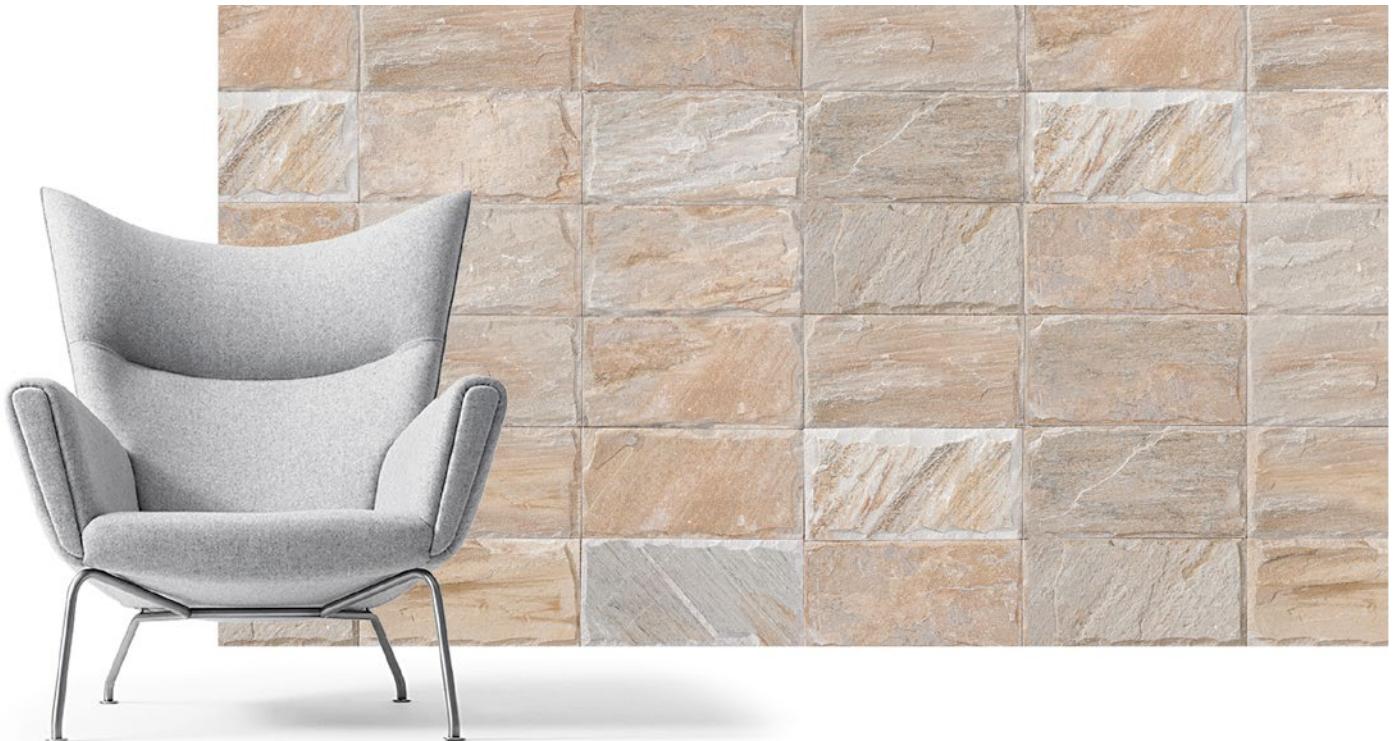

+

MEASURES Standard: 30x15cm, 40x20cm. Minimum thickness 1cm.
Can be produced in any size up to 100X50cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GOLDEN	GRAY	LIGHT	HIGH	-

* Finish: Sawn, no calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	RIDGED	LOW	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	0.27±0.04%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 18.02±2.93MPa Vie: 13.15MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.60±5.94MPa Vie: 10.65MPa
	Abrasive resistance (mm)	27.5mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 75 / wet: 55

+

Test results and technical information available in: CUPA-STONE.COM

ORIENT GOLD QUARTZITE mushroom


Actual size.



CUPA GREEN QUARTZITE

ORIGIN: India

Bright green rock with the possibility of pinkish streaks. Compact and with an uneven texture, consisting of limestone crystals.

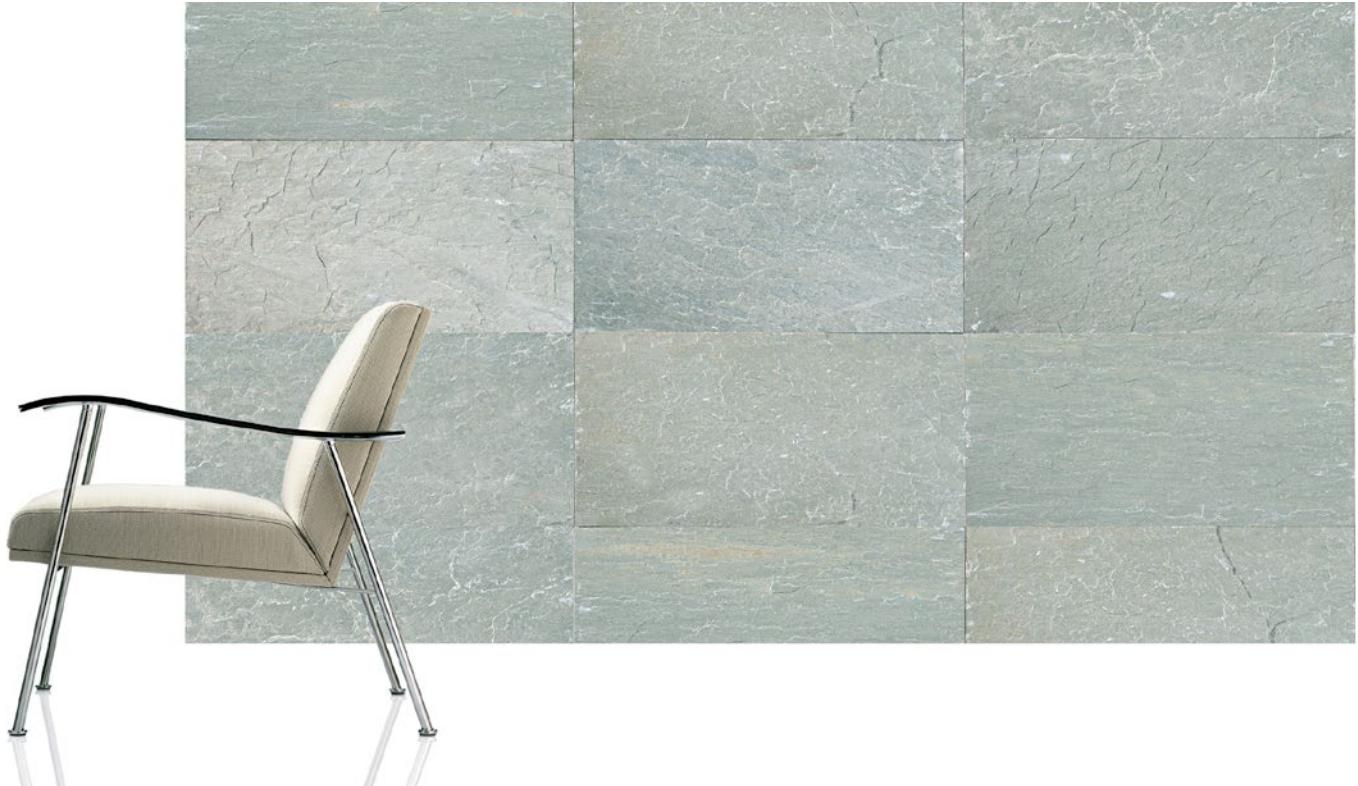

+

MEASURES Standard: 60x30, 60x40. Thickness: 1.5 to 2cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GREEN	TURQUOISE GREEN	COLOR	LOW	-

* Finish: Rectified.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT/IRREGULAR	LOW	NO	GOOD	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	0.38±0.15%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 25.13±10.45MPa Vie: 6.79MPa
Frost resistance (MPa)		Resistant after 48 cycles: Med.Value 25.50±8.83MPa Vie: 10.17MPa
Abrasive resistance (mm)		34.7±2.36mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 71 / wet: 53

+

Test results and technical information available in: CUPA-STONE.COM

CUPA GREEN QUARTZITE

Actual size.



ANTHRACITE GREY PHYLLITE

ORIGIN: India

Slate-like dark toned rock, with visible quartz crystals. Hard and versatile.



Standard: 60x30cm, 60x40cm. Thickness: 1.2 to 3cm.

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.2 to 3cm.
Big sizes available.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BLUE	BLACK	DARK	LOW	-

* Finish: Polished, honed, aged.

Texture Absorption Oxidation Strength Cleaning

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.820kg/m ³
	Water absorption (%)	-
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 53.60±10.45MPa Vie: 44.70MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 53.6MPa Vie: 44.7MPa
	Abrasive resistance (mm)	-
	Slip resistance (mm)	-

ANTHRACITE GREY PHYLLITE


Actual size.



CLASSIC BEIGE MARBLE

ORIGIN: Turkey

Creamy and light marble with distinctive natural stripping.

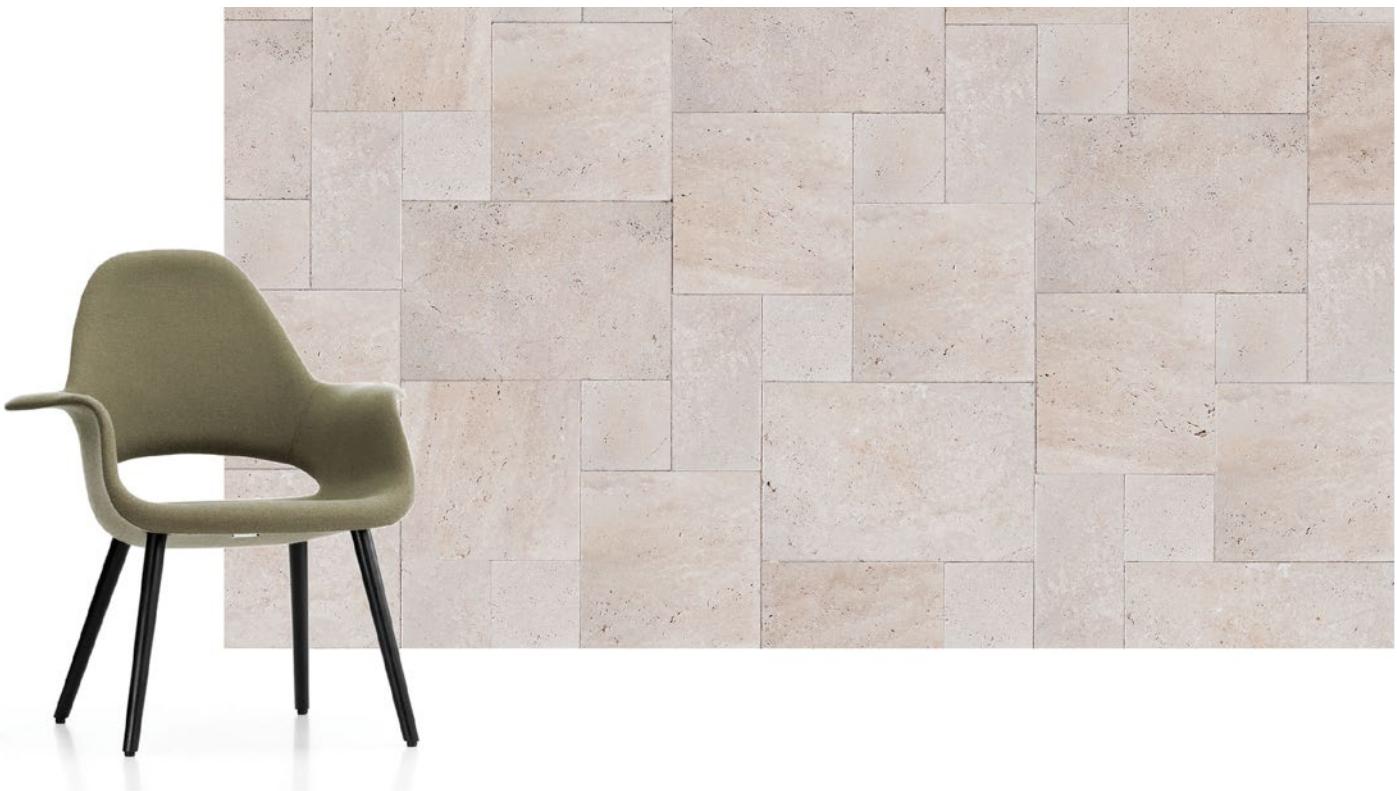

+

MEASURES Special dimension: Roman Pattern.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	WHITE	CREAM	LIGHT	LOW	AGED

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m³)	2.390kg/m³
	Water absorption (%)	1.40%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 12.8±2.0MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 12.8±2.0MPa
	Abrasive resistance (mm)	-
Slip resistance (mm)		SRV Values (natural finish): dry: 50 / wet: 38

+

Test results and technical information available in: CUPA-STONE.COM

CLASSIC BEIGE MARBLE

Actual size.



YELLOW MARBLE

ORIGIN: Turkey

Golden marble with distinctive brown and cream colored natural striping.



+

MEASURES Special dimension: Roman Pattern.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	GOLDEN	BROWN	COLOR	LOW	AGED

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	YES

+


TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.420kg/m ³
	Water absorption (%)	2.60%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 9.7±0.8MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 13.9MPa
	Abrasive resistance (mm)	-
	Slip resistance (mm)	SRV Values (natural finish): dry: 58 / wet: 53

+

Test results and technical information available in: CUPA-STONE.COM

YELLOW MARBLE

Actual size.

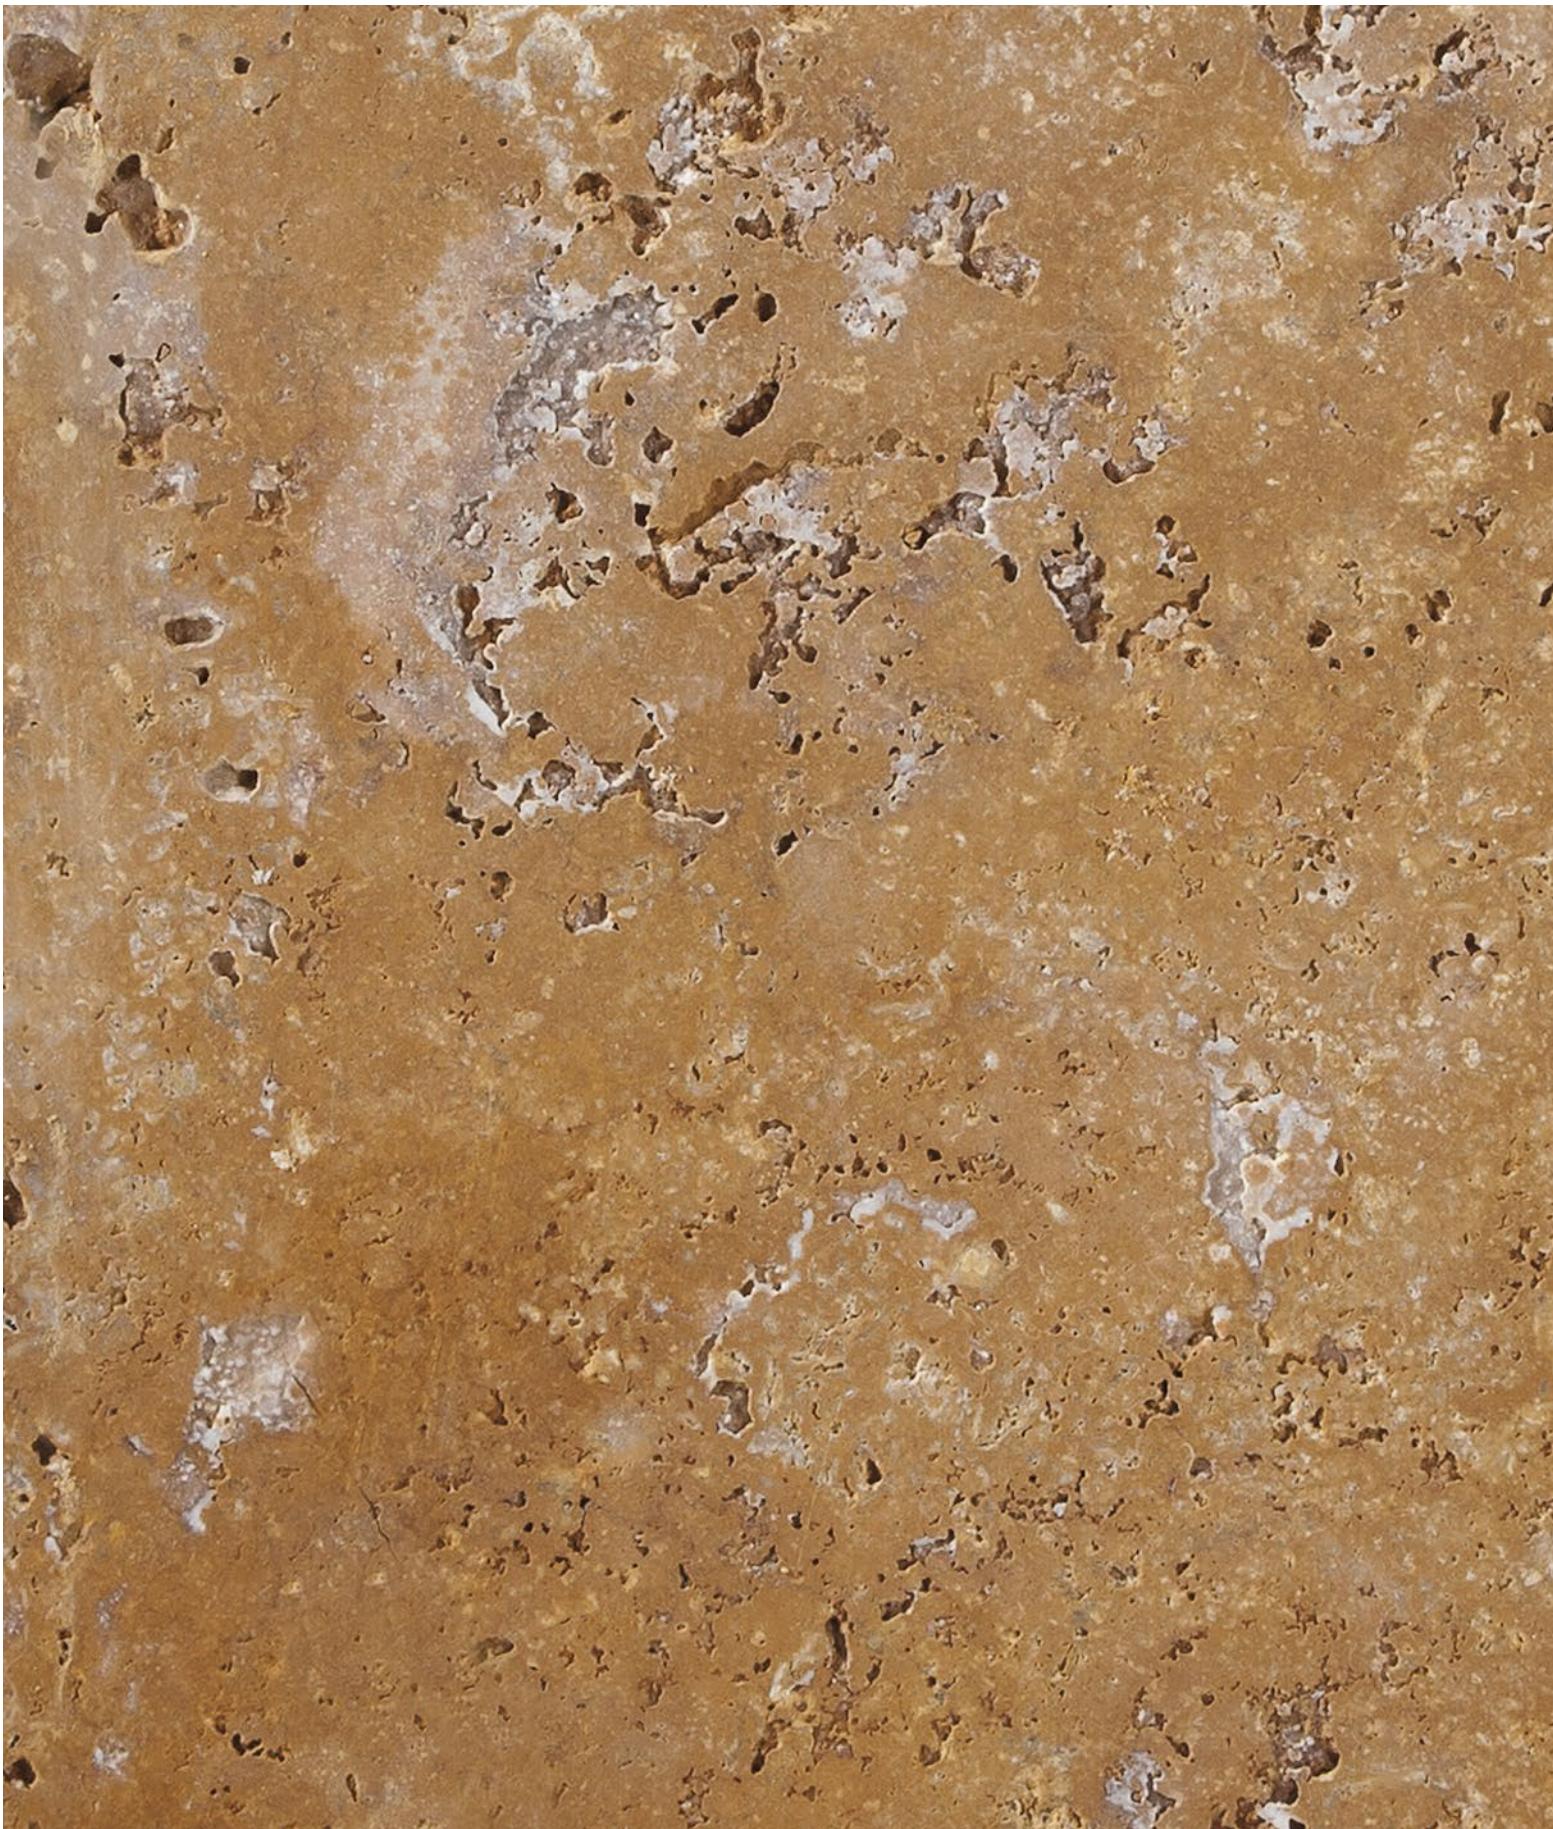

CELESTE SLATE

ORIGIN: Brasil

Grey-green shaded slate with typical slate texture and well-developed veining.



CELESTESLATE


Actual size.



STORMSLATE

ORIGIN: Brasil

Bluish-grey slate with distinctive water-like texture.

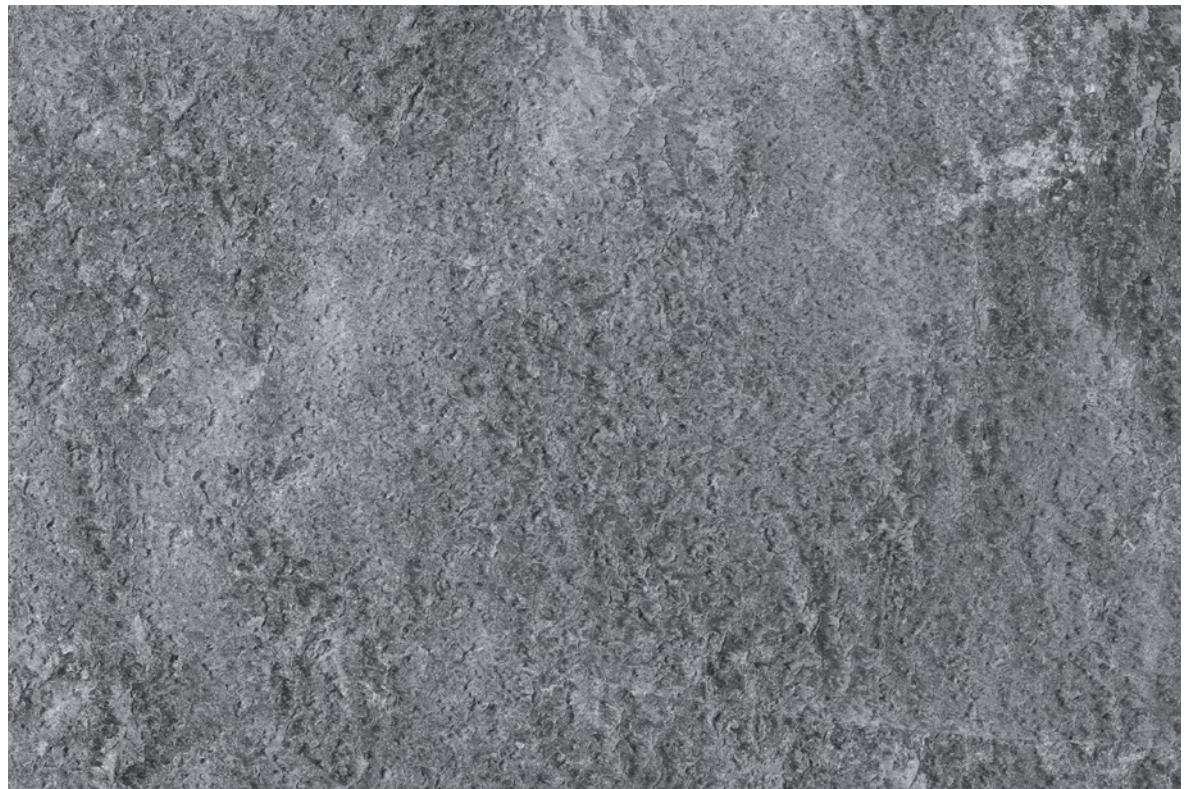

MEASURES Standard: 60x30cm. Thickness: 1.5 to 2cm.

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	BLUE	GRIS	COLOR	LOW	NATURAL

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
RIDGED	LOW	NO	GOOD	NORMAL	

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.8±0.02kg/m ³
	Water absorption (%)	0.26±0.05%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 26.34±6.65MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 24.27±5.42MPa Vie: 14.70MPa
	Abrasive resistance (mm)	23.3mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 79 / wet: 50

STORMSLATE

Actual size.



MAKALISLATE

ORIGIN: Spain

Dark slate with black tones and a rugged natural appearance.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1cm.
Contact us for other sizes.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BLACK	DARK GRAY	DARK	VERY LOW	-

* Finish: Natural, calibrated.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	RIDGED	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m³)	2.840kg/m³
	Water absorption (%)	0.3±0.4%
	Reaction to fire	A1
	Bending strength (MPa)	51MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 19.1MPa
	Abrasive resistance (mm)	34mm.
	Slip resistance (mm)	SRV Values: 40

+

MAKALI SLATE


Actual size.



MULTICOLOURED SLATE

ORIGIN: Brasil

Multicolour slate with green, ochre and rusty circular marks.

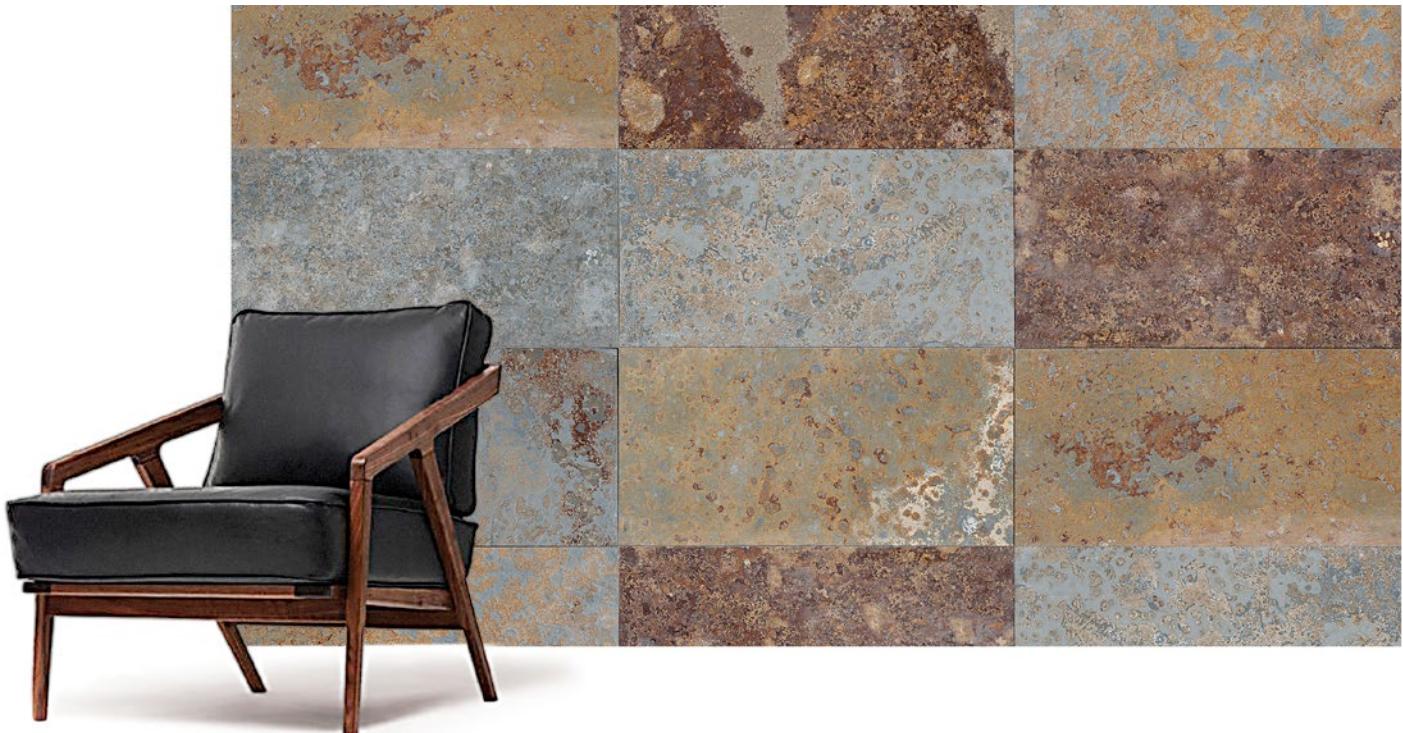

+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 200x100cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	GOLDEN	BROWN	COLOR	VERY HIGH	-

* Finish: Natural/natural, natural/calibrated, bullnose.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	COMPACT	LOW	OXIDA AL ENVEJECER	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.730kg/m ³
	Water absorption (%)	0.52±0.01%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 43.18±7.28MPa Vie: 28.78MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.66±5.77MPa Vie: 2.69MPa
	Abrasive resistance (mm)	25mm.
	Slip resistance (mm)	SRV Values (natural finish): dry: 74 / wet: 44

+

Test results and technical information available in: CUPA-STONE.COM

MULTICOLOURED SLATE

Actual size.



MULTICOLOURED RUSTIC SLATE

ORIGIN: China

Multicolour brown slate with red and golden tones and visible exfoliation.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 2,5cm.
Contact us for other sizes.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BROWN	GRAY	COLOR	VERY HIGH	NATURAL

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	EXFOLIATION	AVERAGE	YES	MODERATE	NORMAL

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	NO

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.700kg/m ³
	Water absorption (%)	1.04±0.62%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 17.86±6.57MPa Vie: 6.79MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 14.66±5.77MPa Vie: 2.69MPa
Abrasive resistance (mm)		25.5mm.
Slip resistance (mm)		SRV Values (Natural Finish): >40

+

Test results and technical information available in: CUP4STONE.COM

MULTICOLOURED RUSTIC SLATE

Actual size.



MULTICOLOURED RUSTIC SLATE mushroom

ORIGIN: China

Multicolour brown slate with red and golden tones and visible exfoliation.




MULTICOLOURED RUSTIC SLATE mushroom Actual size.

MULTICOLOURED ASIA SLATE

ORIGIN: China

Multicolour brown slate with blue and rusty shapes in varying proportions.

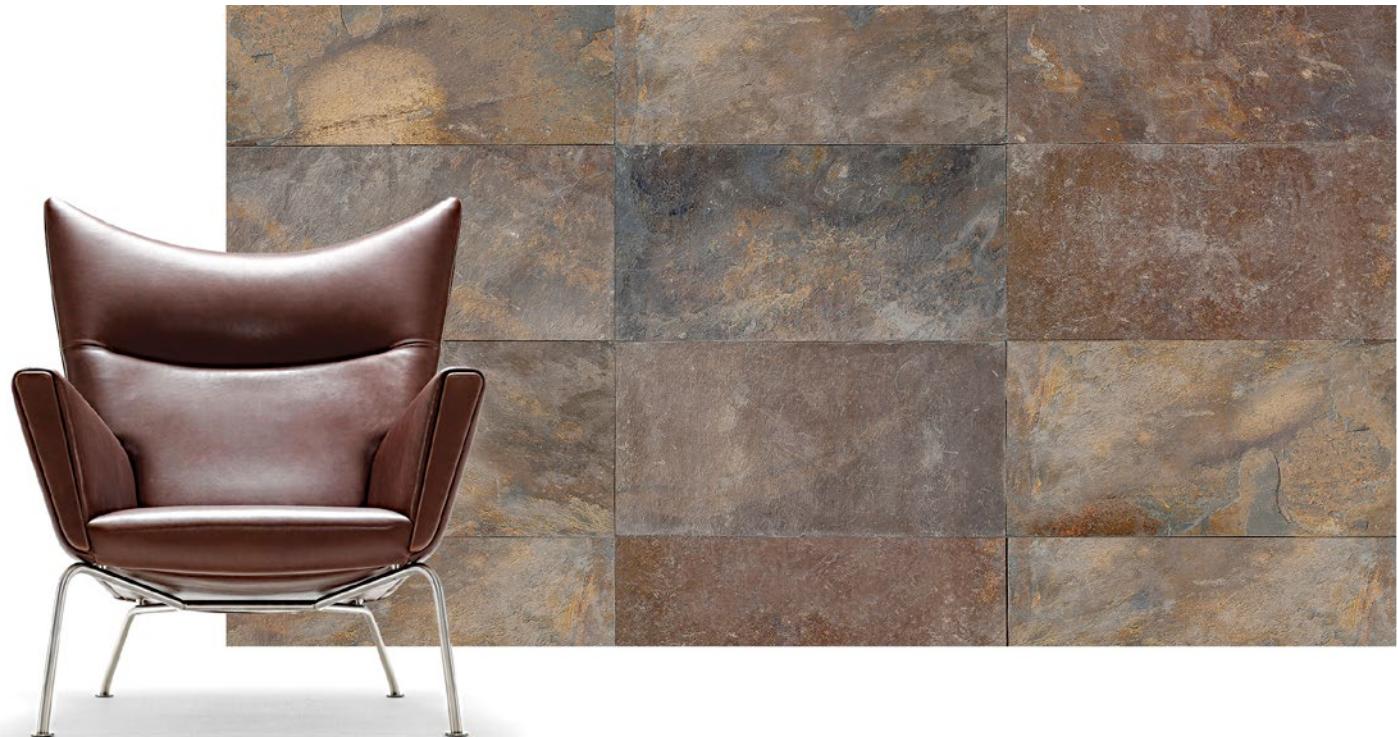

+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1cm.
Contact us for other sizes.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	BROWN	RED	COLOR	VERY HIGH	PLANIFICADO

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	EXFOLIATION	LOW	YES	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	NO

+

TECHNICAL INFORMATION	Specific weight (kg/m ³)	2.720kg/m ³
	Water absorption (%)	0.62±0.32%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 41.34±12.68MPa Vie: 19.91MPa
Frost resistance (MPa)		Resistant after 48 cycles: Med.Value 37.00±11.85MPa Vie: 19.07MPa
Abrasive resistance (mm)		25mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 71 / wet: 44

+

Test results and technical information available in: CUPA-STONE.COM

MULTICOLOURED ASIA SLATE

Actual size.



NAVY SLATE

ORIGIN: China


Dark grey slate with a uniform tone and visible exfoliation.



MEASURES	Standard: 60x30cm, 60x40cm. Minimum thickness 1cm. Can be produced in any size up to 200x70cm..							
APPEARANCE	Main color BLUE	Secondary colour DARK BLUE	Tone DARK	Tone variation LOW	Finish PLANIFICADO			
FEATURES	Texture RIDGED	Absorption AVERAGE	Oxidation YES	Strength AVERAGE	Cleaning EASY			
RECOMMENDED APPLICATIONS	Interior wall YES	Exterior wall YES	Interior flooring YES	Exterior flooring YES	Garden YES	Swimming Pool NO	Road surface YES	Pavement YES
TECHNICAL INFORMATION	Specific weight (kg/m³) 2.720kg/m³	Water absorption (%) 0.09±0.01%	Reaction to fire A1	Bending strength (MPa) Dry/Med.Value 68.86±21.60MPa Vie: 36.18MPa	Frost resistance (MPa) Resistant after 48 cycles: Med.Value 61.14±17.66MPa Vie: 34.58MPa	Abrasive resistance (mm) 26.5±3.50mm.	Slip resistance (mm) SRV Values (natural finish): dry: 71 / wet: 54	

NAVY SLATE

Actual size.

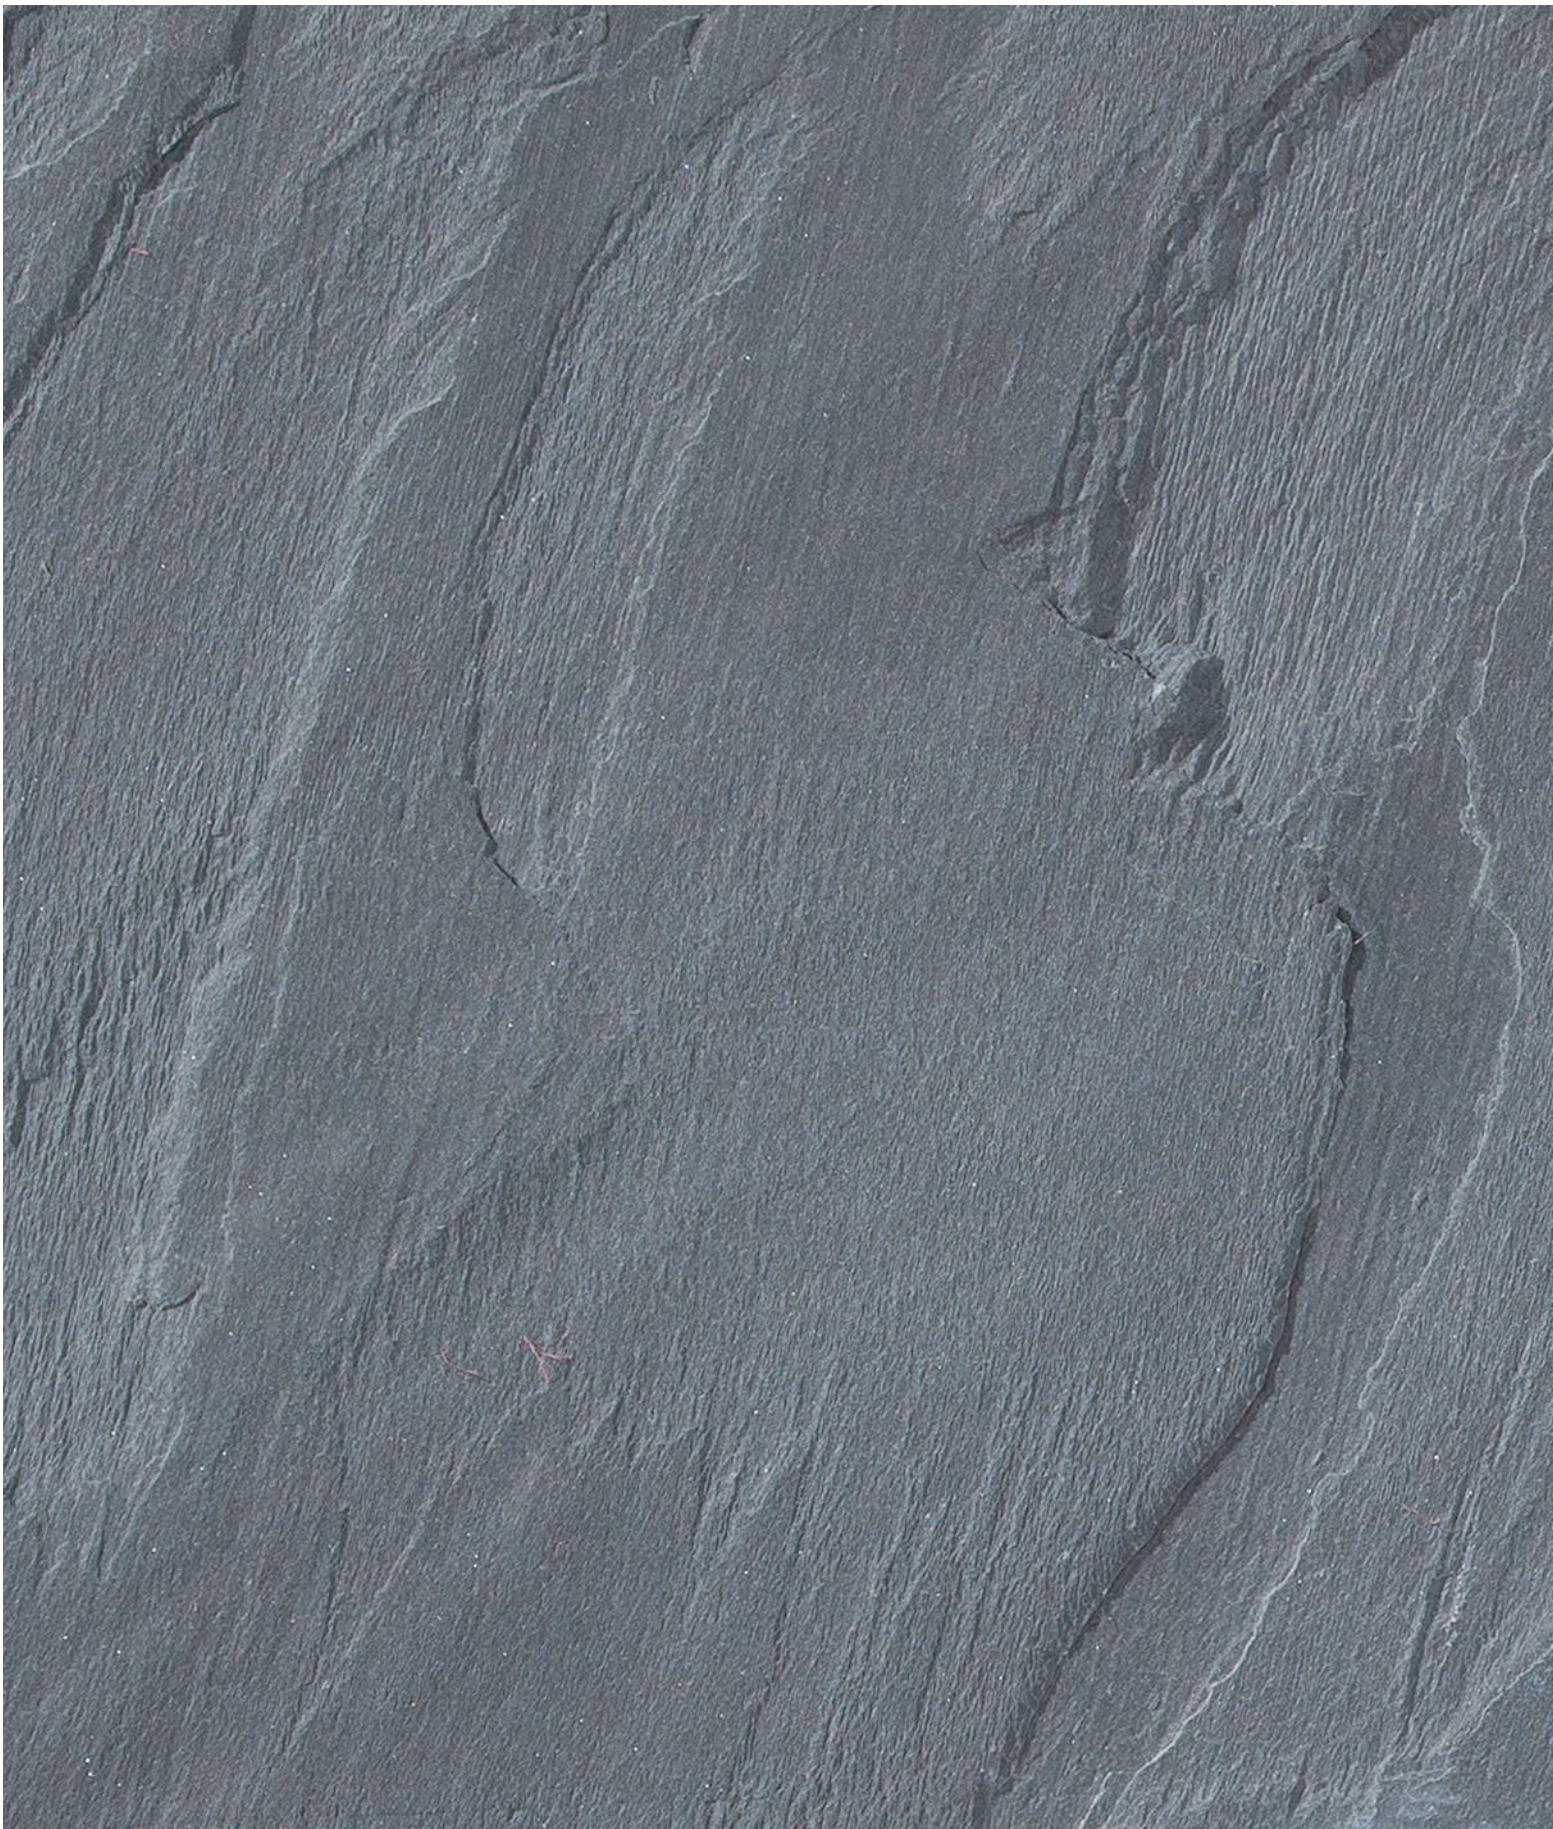

GRAFFITI SLATE

ORIGIN: Brasil

Black shaded slate with grey tones, typical slate texture and well-developed veining.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1 to 3cm.
Can be produced in any size up to 200x100cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish*
	BLUE	BLACK	DARK	LOW	-

* Finish: Natural/natural, natural/calibrated, calibrated/brushed, calibrated/honed, bullnose.

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	SLATE TEXTURE	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	YES	YES

+

TECHNICAL INFORMATION	Specific weight (kg/m³)	2.720kg/m³
	Water absorption (%)	0.58±0.0%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 45.59±9.83MPa Vie: 26.32MPa
	Frost resistance (MPa)	Resistant after 48 cycles: Med.Value 27.33±11.88MPa Vie: 7.94MPa
Abrasive resistance (mm)		27.6mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 75 / wet: 59

+

Test results and technical information available in: CUPA-STONE.COM

GRAFFITI SLATE

Actual size.



GUYANA GREEN SLATE

ORIGIN: China

Sedimentary green rock with grey tones. Very homogeneous and compact.



+

MEASURES Standard: 60x30cm, 60x40cm. Thickness: 1.2 to 1.5cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	GREEN	GREEN	COLOR	LOW	PLANIFICADO

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	HOMOGENEOUS	LOW	NO	GOOD	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	YES	YES	YES

+


TECHNICAL INFORMATION	Specific weight (kg/m³)	2.750kg/m³
	Water absorption (%)	0.32±0.03%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 41.26±18.56MPa Vie: 13.04MPa
Frost resistance (MPa)		Resistant after 48 cycles: Med.Value 13.00±0.82MPa Vie: 11.37MPa
Abrasive resistance (mm)		27.6mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 71 / wet: 47

+

Test results and technical information available in: CUPA-STONE.COM

GUYANA GREEN SLATE

Actual size.

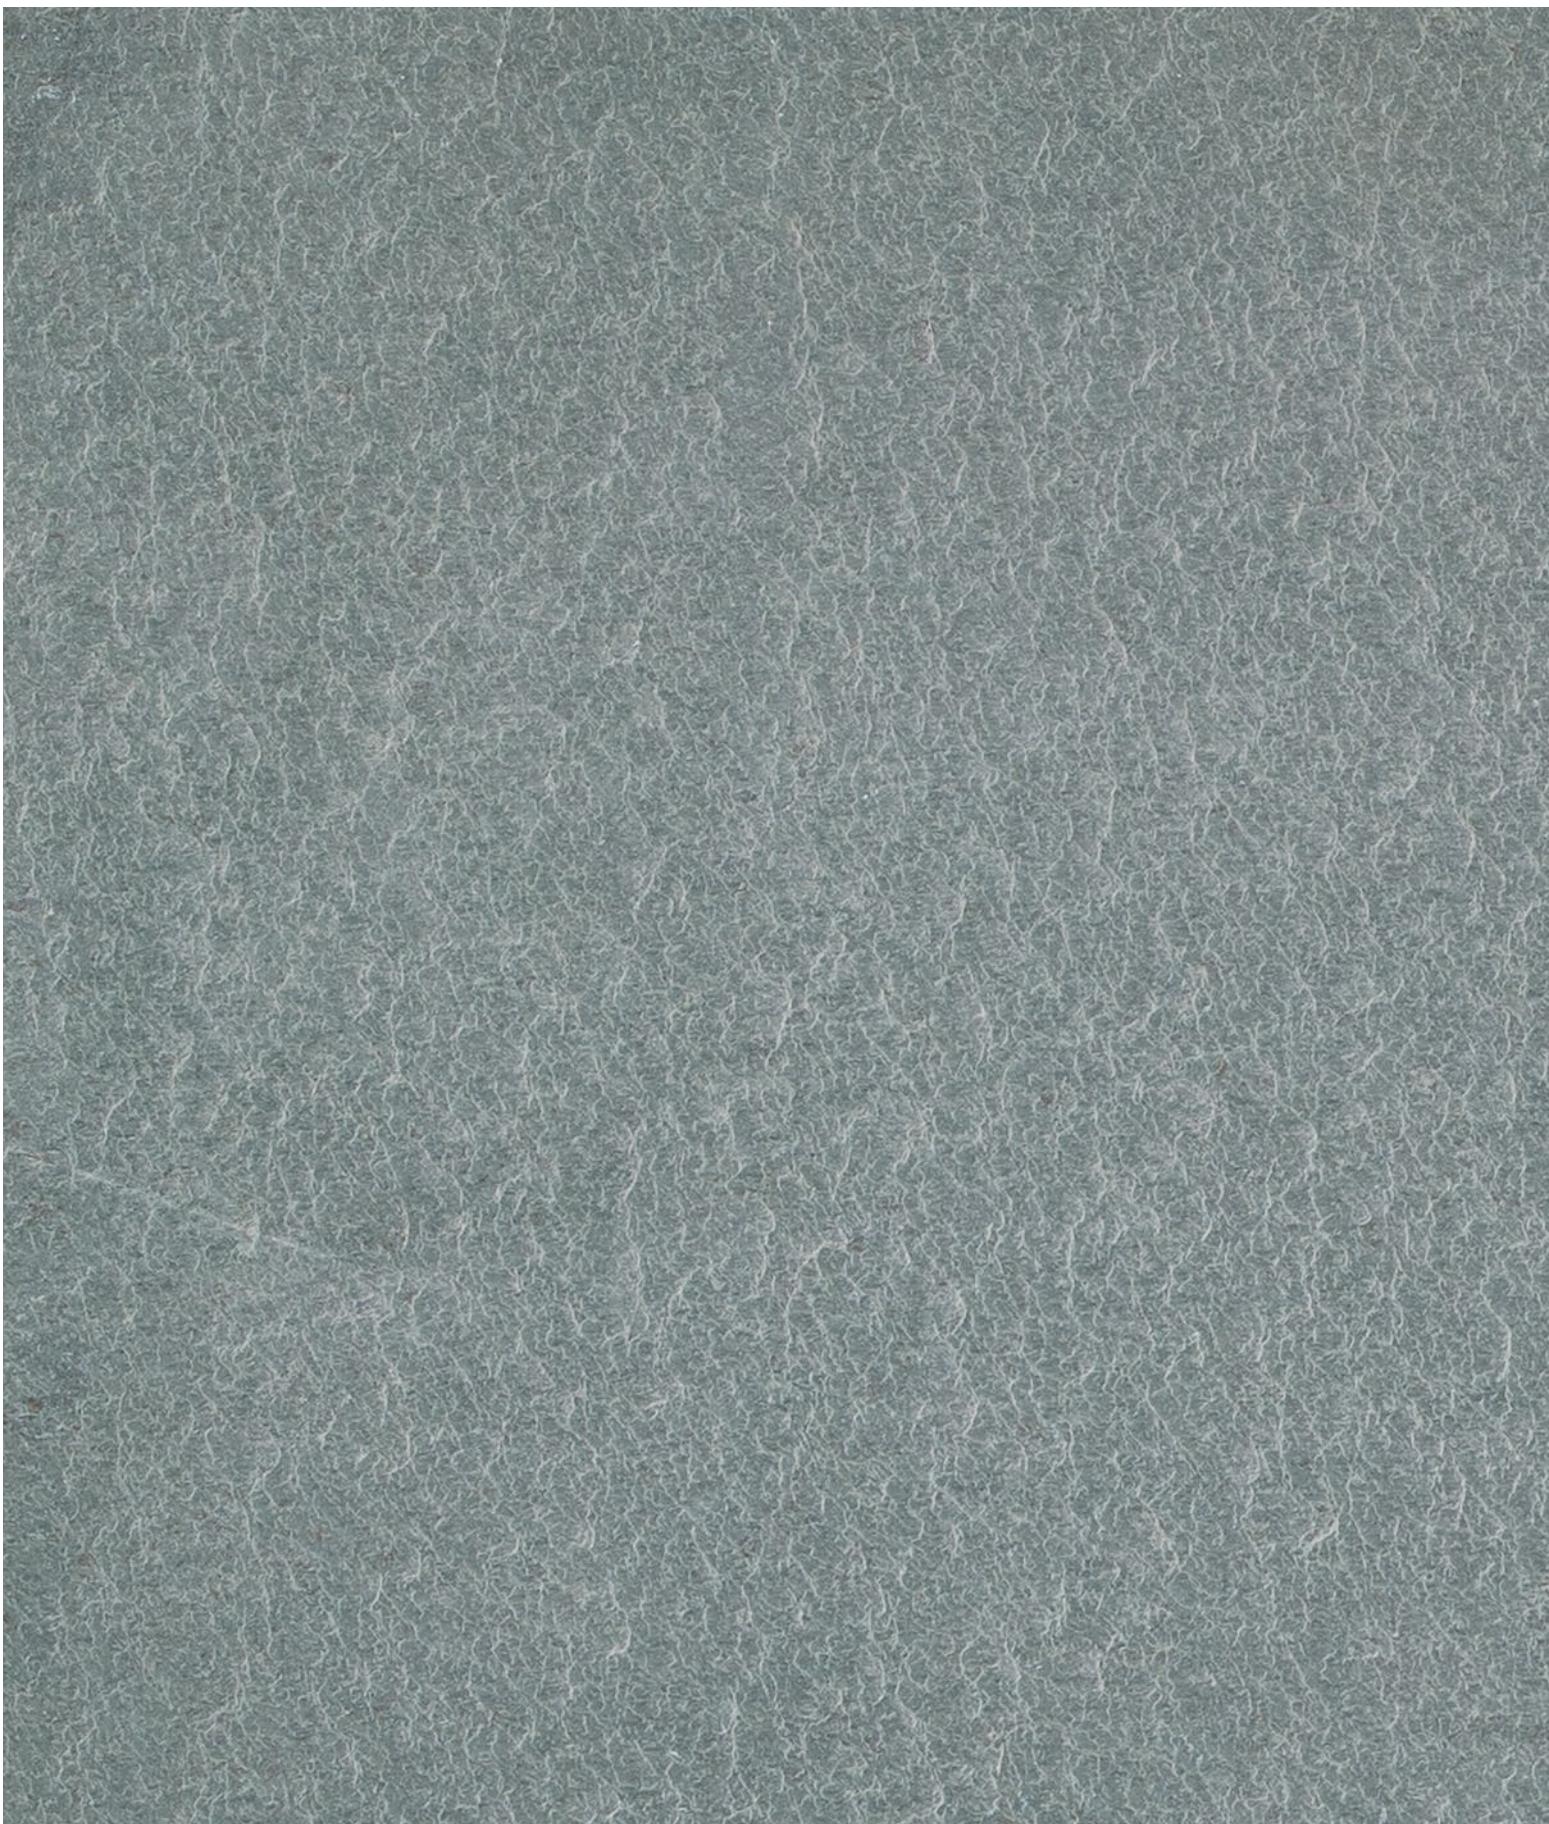

RIOJA KENYA SLATE

ORIGIN: India

Sedimentary brownish-purple coloured slate with typical slate texture and well-developed veining.



+

MEASURES Standard: 60x30cm, 60x40cm. Minimum thickness 1cm.
Can be produced in any size up to 120x40cm.

+

APPEARANCE	Main color	Secondary colour	Tone	Tone variation	Finish
	BROWN	RED	COLOR	VERY LOW	RECTIFIED

+

FEATURES	Texture	Absorption	Oxidation	Strength	Cleaning
	EXFOLIATION	HIGH	NO	AVERAGE	EASY

+

RECOMMENDED APPLICATIONS	Interior wall	Exterior wall	Interior flooring	Exterior flooring	Garden	Swimming Pool	Road surface	Pavement
	YES	YES	YES	YES	YES	NO	NO	NO

+


TECHNICAL INFORMATION	Specific weight (kg/m³)	2.350kg/m³
	Water absorption (%)	3.19±0.72%
	Reaction to fire	A1
	Bending strength (MPa)	Dry/Med.Value 30.72±2.75MPa Vie: 25.25MPa
Frost resistance (MPa)		Resistant after 48 cycles: Med.Value 26.77±6.85MPa Vie: 12.56MPa
Abrasive resistance (mm)		28.5mm.
Slip resistance (mm)		SRV Values (natural finish): dry: 79 / wet: 53

+

Test results and technical information available in: CUPA-STONE.COM

RIOJA KENYA SLATE

Actual size.

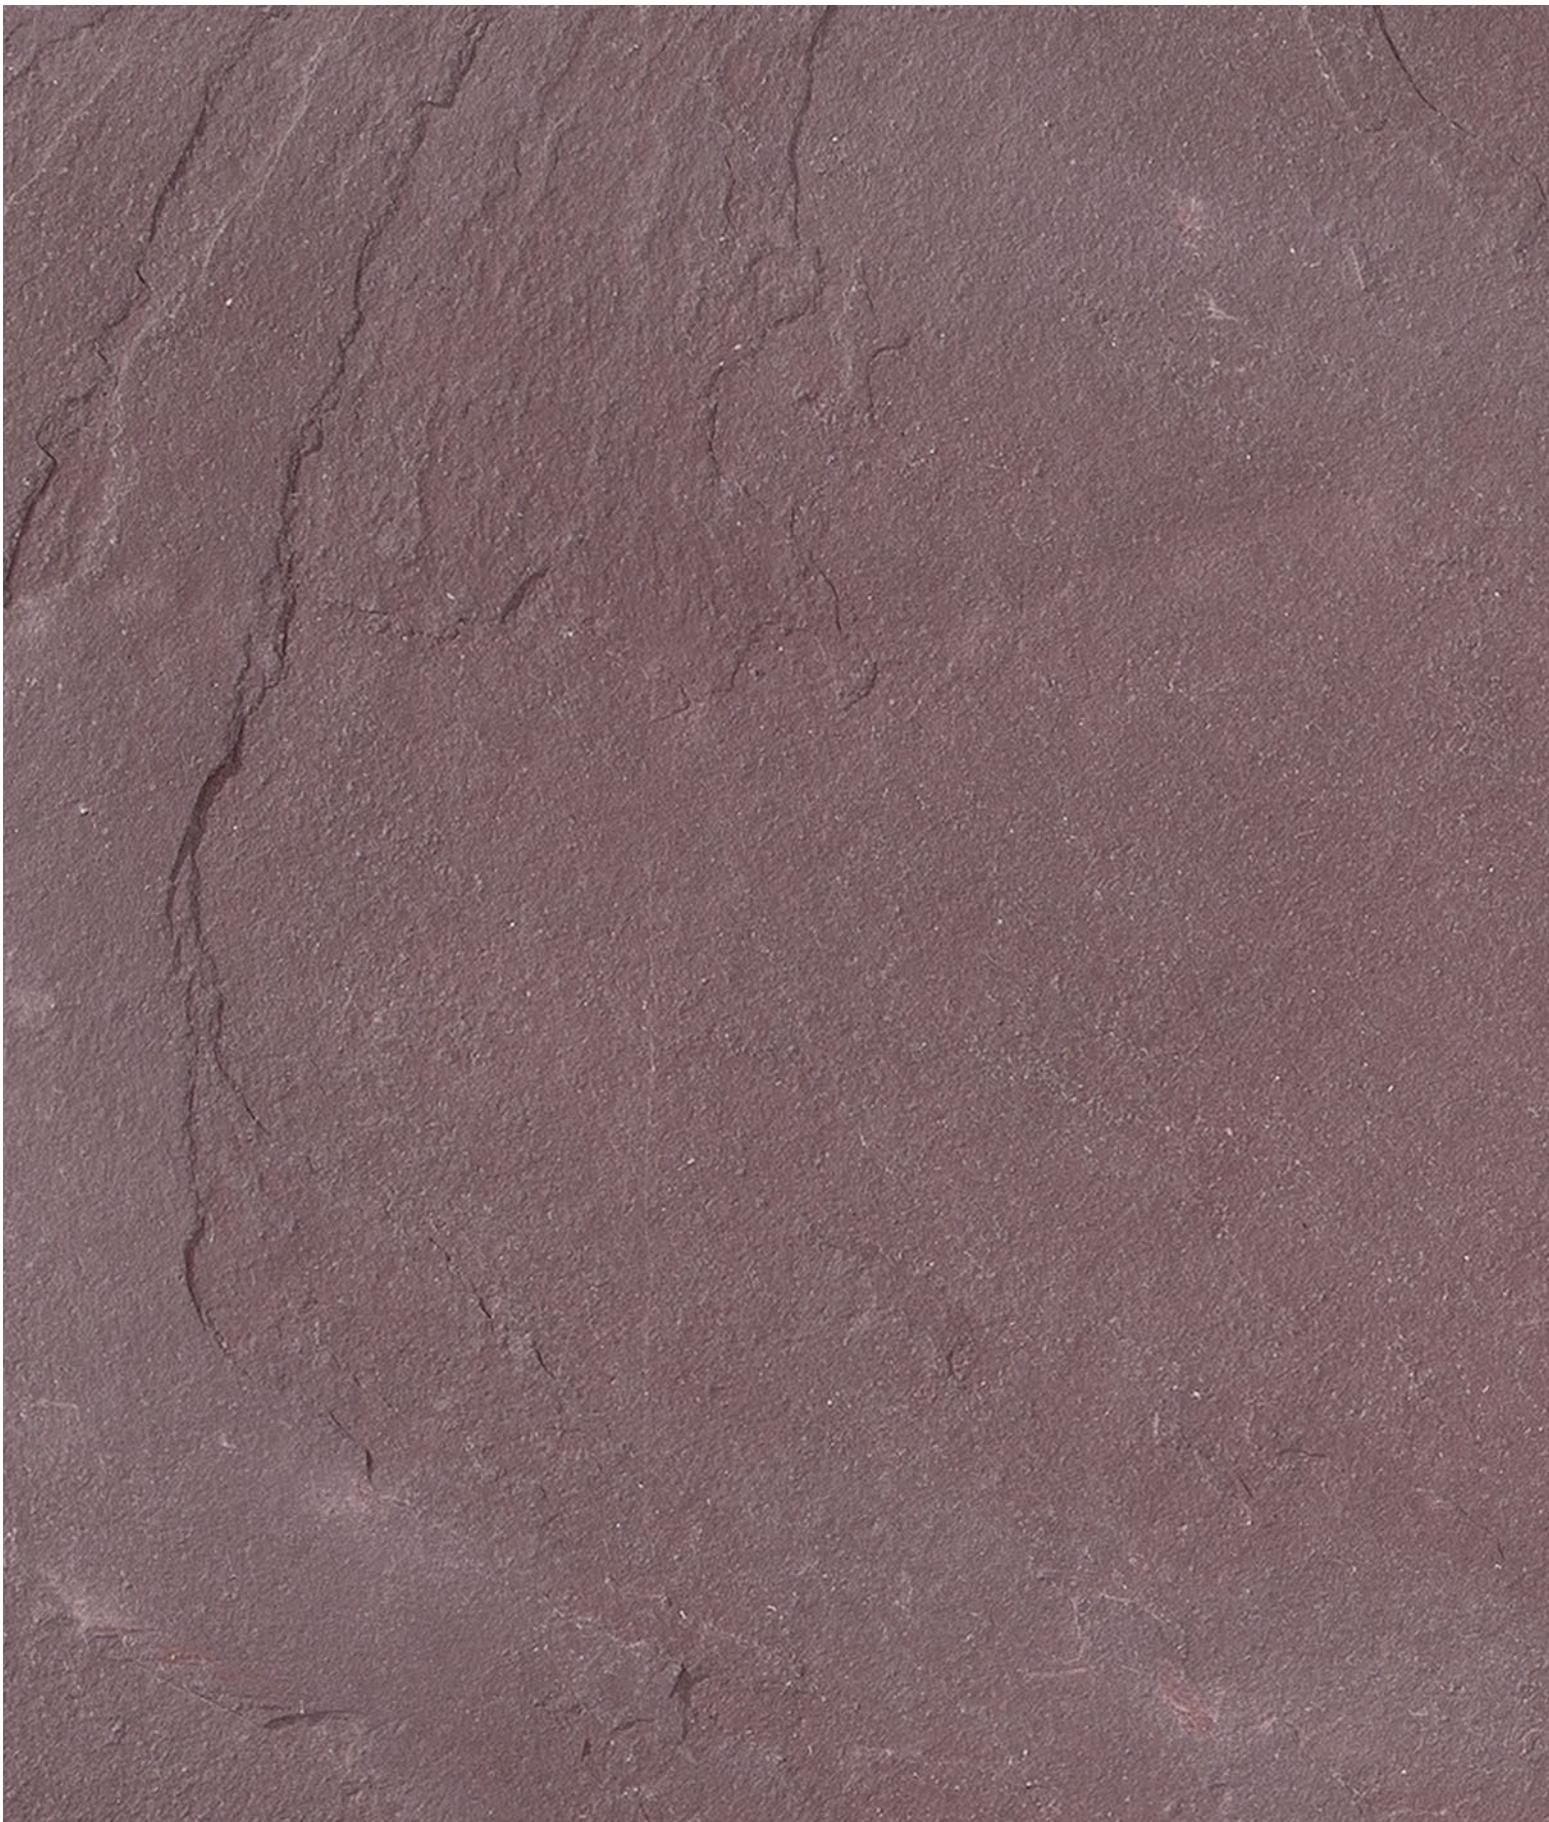

NATURAL TILES

CUP4STONE.COM

